

HY-6900T10

Barcode scanner

2D Wired




Features:



Quick scan
Precise identification



1D 2D Code
Screen code




Drop-resistant
sturdy and durable



Plug and Play
Wired connection

Application: Logistics, manufacturing, healthcare, retail, etc

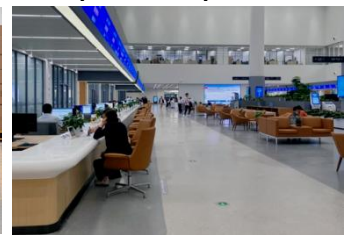

Parameter :

| Performance Characteristics | |
|--|---|
| Image(Pixels) | 300,000 pixels |
| Scanning speed | 260 times/second |
| Light source | Aiming630nmLED; Illumination:6500KIED |
| Field of view | H:40° V:31° |
| Printing Contrast | 10%minimum reflective difference |
| Scanning angle | 360°,±45°,±45° |
| Interface support | USB / RS232 |
| Decode Capability | |
| 1D | Code 128、EAN-13 、EAN-8、UPC-E、UPC-A、ISBN、ISSN、Code11、ITF-25 (Interleaved 2 Of 5) 、Code39、Code93、Code32、Codabar、Matrix 2 of 5、Industrial 25、IATA 25、MSI Plessey |
| 2D | QR Code、Micro QR、Data Matrix 、PDF417、Micro PDF417、Aztec |
| User Environment | |
| Operating Temperature | -20°C~+60°C |
| Storage Temperature | -30°C~+70°C |
| Humidity | 0%~95% Relative humidity,non-condensing |
| Seismic resistance | Designed to withstand 1.5m(6)drops |
| Ambient Lighting | 0~100000LUX |
| Decode Ranges | |
| EAN-13 | 50mm-280mm (13mil 13字节) |
| Code39 | 50mm-100mm (5mil 7字节) |
| Code128 | 50mm-310mm (13mil 10字节) |
| QR Code | 20mm-170mm (15mil 30字节) |
| Data Marix | 40mm-110mm (10mil 100字节) |
| PDF 417 | 50mm-100mm (6.67mil 30字节) |
| Physical Characteristics | |
| Dimensions | (L)170mm*(W)68mm*(H)90mm |
| Weight | Scanner 135g Packing 120g |
| Input Voltage, Operating Voltage | DC4.7-5V, DC3.3V |
| Operating Current, Standby Current | 210MA, 65MA |
| Application scope | |
| Express Logistics Supermarket chain Manufacture An institution etc | |

